

Smart-Net Server – Liebert PSA-1000 UPS

Thank you for purchasing your Liebert PSA-1000 UPS. This will protect your Smart-Net Server from power spikes and outages.

- 1) Open the box and remove the UPS.
- 2) Use the USB cable supplied with the UPS when connecting it to the Smart-Net server.
- 3) When setting the driver version, follow the screenshots below according to your version of Smart-Net. (Figure 1.1 & Figure 1.2)
- 4) Check to see it is communicating; go to Server Management, Monitor UPS. (Figure 2)

USB cable.

Plug the server in here.



Figure 1.1 – Smart-Net v2.1

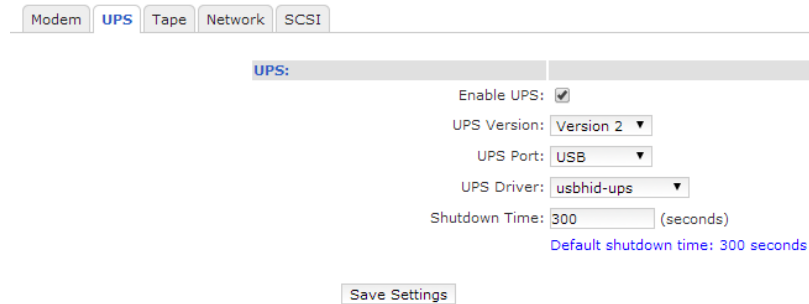


Figure 1.2 – Smart-Net v3.0

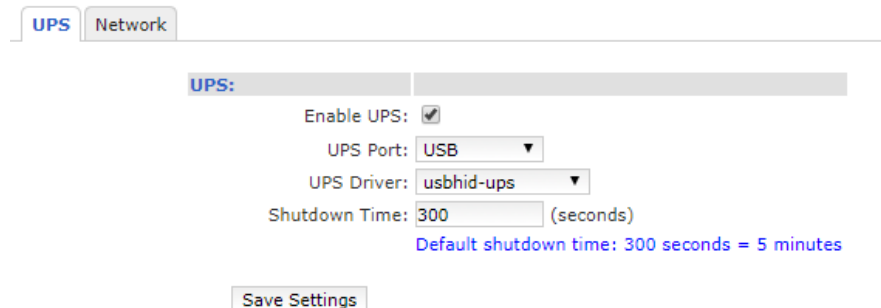


Figure 2

Network UPS Tools 2.7.1							
Mon Feb 24 16:27:15 NZDT 2014							
Model	Status	Battery	Input (VAC)	Output (VAC)	Load (%)	UPS Temp	Battery Runtime
LiebertPSA	ONLINE	100 %	233.9	236.0	2 %		